


# SUBMERSIBLE HOLLOW SHAFT - 19MM/0.748"

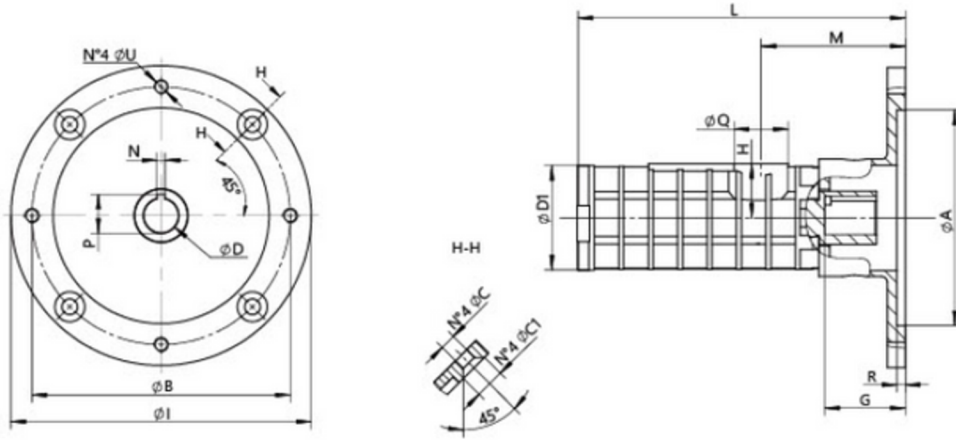

Model	Flange				Shaft			Discharge		Pump				
	ØA	ØB	ØC	ØI	ØD	P	N	H	Q	ØD1	L	G	M	lbs
PMPGR25	4.5028 4.5012	5.875	0.406	6.527	0.6368 0.6348	0.728	0.209	1.654	1"NPT	3.484	10.413	2.323	4.035	6.6
PMPGR32	4.5028 4.5012	5.875	0.406	6.527	0.6368 0.6348	0.728	0.209	1.654	1"NPT	3.484	10.413	2.323	4.035	6.6

3550 RPM, 60 Hz, 315.8 SSU																
Model	145 PSI		290 PSI		435 PSI		580 PSI		725 PSI		870 PSI		1015 PSI		1160 PSI	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
PMPGR2530L-HSE	11.62	1.74	11.20	2.68	10.80	3.75	10.46	4.83	10.14	6.17	9.77	7.11	9.38	8.05	8.88	9.66
PMPGR3235L-HSE	12.36	1.61	12.18	2.55	11.99	4.02	11.78	5.36	11.57	6.44	11.36	7.38	11.10	8.31	10.62	10.46
PMPGR3245L-HSE	15.48	1.88	15.35	3.49	15.22	5.10	15.06	6.44	14.90	8.05	14.69	9.66	14.42	11.00	13.95	12.20
PMPGR3255L-HSE	18.39	2.28	18.07	4.02	17.75	5.90	17.44	7.51	17.12	9.39	16.70	11.00	16.30	12.61	15.85	13.81

## REPLACEMENT INFORMATION

ZZIPCO		Settima	
Model	GPM	Model	GPM
PMPGR2530L-HSE	4.7	GR25SMU30LAC56C	4.7
PMPGR3235L-HSE	5.9	GR32SMU35LAC56C	5.9
PMPGR3245L-HSE	7.1	GR32SMU45LAC56C	7.1
PMPGR3255L-HSE	8.5	GR32SMU55LAC56C	8.5

